




SOLENOID CONTROLLED PILOT OPERATED DIRECTIONAL SAFETY VALVE

SWPS SERIES

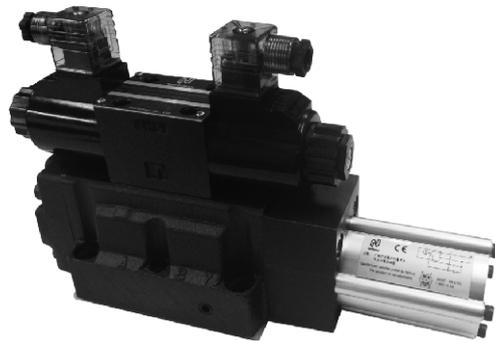

Solenoid Controlled Pilot Operated Directional Safety Valve With Position Switch Sensor

■ HOW TO ORDER

SWPS	-G	04	-C2	-E	T	-D24	-40	V
Series	Mounting Style	Nominal Size	Spool Type	Pilot Type	Drain Type	Coil Voltage	Design Code	Seal Material
Solenoid Controlled Pilot Operated Directional Safety Valve With Position Switch Sensor	Subplate Mounted	04: 16mm 06: 20mm	B22M, C2, B2, B2S, C2B, C2BS Other Spool Types, Please Contact Northman	E: External Pilot No Code: Standard Internal Pilot Type	T: External Drain No Code: Standard Internal Drain Type	D24: DC24V D12: DC12V	40: Inductive Position Switch Sensor	No code: NBR Seals V: Viton Seals

■ BOLT

Model	Size	Strength Grade	Mounting Torque
SWPS-G04	4-M10X40L	12.9	580 ~ 720kgf. cm
	2-M6X35L	12.9	120 ~ 150kgf. cm
SWPS-G06	6-M12X60L	12.9	1000 ~ 1230kgf. cm

Note: Please contact us for further technical information.